



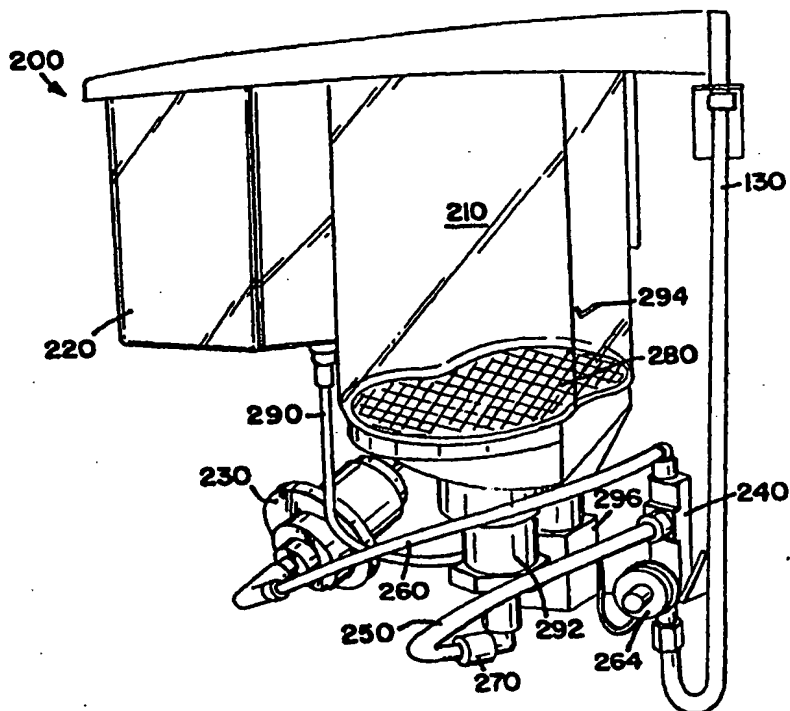
INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A47L 15/44	A1	(11) International Publication Number: WO 00/25658 (43) International Publication Date: 11 May 2000 (11.05.00)
(21) International Application Number: PCT/US99/24419 (22) International Filing Date: 18 October 1999 (18.10.99) (30) Priority Data: 09/182,121 29 October 1998 (29.10.98) US (71) Applicant: ECOLAB INC. [US/US]; Ecolab Center, St. Paul, MN 55102 (US). (72) Inventors: TARARA, James, J.; 8976 St. Croix Road, Woodbury, MN 55125 (US). DAVIDSON, Glen, W.; 1780 County Road C2, Roseville, MN 55113 (US). LENTSCH, Steven, E.; 21 Orme Court, St. Paul, MN 55116 (US). (74) Agent: DAIGNAULT, Ronald, A.; Merchant, Gould, Smith, Edell, Welter & Schmidt, P.A., 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US).		(81) Designated States: AU, BR, CN, JP, MX, ZA, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: HYDRAULIC CONTROL OF DETERGENT CONCENTRATION IN AN AUTOMATIC WAREWASHING MACHINE

(57) Abstract

An apparatus for maintaining an effective concentration of alkaline detergent in an aqueous medium in a warewashing machine, which apparatus comprises a batch-fill warewashing machine having an aqueous rinse system, an alkaline detergent dispenser and a sump sized for a predetermined volume of an aqueous solution of the alkaline detergent in the aqueous medium; a source of the aqueous medium fluidly connected to the rinse system; means for controlling the flow of the aqueous medium through the rinse system; diverting means for obtaining a predetermined portion of the aqueous flow from the rinse system and for directing the diverted portion through a metering cap and volume control to the alkaline detergent dispenser, thereby to dissolve the alkaline detergent; and means for directing the dissolved alkaline detergent to the sump; wherein the detergent is dispensed only in a rinse cycle and an effective concentration of alkaline detergent is maintained in the warewashing machine sump.



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HYDRAULIC CONTROL OF DETERGENT CONCENTRATION
IN AN AUTOMATIC WAREWASHING MACHINE

Field of the Invention

5 The invention relates generally to the dissolution and dilution of concentrated solid materials and more specifically to the controlled dissolution and dilution of concentrated solid warewashing detergents to form concentrated liquid solutions. Detergent concentration control is provided exclusively via hydraulic means with no electronic detection of water usage or level, electronic control of detergent content or
10 usage or electronic control of mechanical components.

Background of the Invention

 A number of different techniques have been developed and used for converting solid chemicals used in cleaning processes into a aqueous concentrated
15 solution. For example, devices designed for a powdered, flaked or granular detergent are disclosed in Daley et al, U.S. Pat. No. 3,595,438, issued Jul. 27, 1991; Moffet et al, U.S. Pat. No. 4,020,865, issued May 3, 1977; and Larson et al, U.S. Pat. No. 4,063,663, issued Dec. 20, 1977. Another form of solid detergent is the pre-shaped detergent briquette. Dispensing systems for dissolving detergent
20 briquettes are known in the art. See, for example, U.S. Pat. Nos. 2,382,163; 2,382,164; and 2,382, 165 all issued Aug. 14, 1945 to MacMahon; and U.S. Pat. No. 2,412,819, issued Dec. 17, 1946 to MacMahon.

 One recent form of solid detergent is the solid block form. The detergent block may comprise a detergent extruded or cast within a mold or container or as a
25 detergent block which is free-standing. Dispensing systems for these solids are known in the art. See, for example, U.S. Pat. No. 4,426,362, issued to Copeland et al and commonly owned U.S. Pat. Nos. 4,569,781 and 4,569,780, issued Feb. 11, 1986, to Fernholz et al. The cast detergent is dispensed by spraying a solvent onto the detergent block within the container, thereby dissolving the exposed surface of
30 the detergent to form a concentrated working solution. The concentrated working solution falls into a reservoir or is directed by a conduit to the wash tank of a washing apparatus. When the chemical compound within the container is

completely utilized, the exhausted container may be simply discarded and a fully charged container may be placed in the dispenser.

Solid, cast chemicals used in cleaning processes are preferably cast in a sturdy container which can act as a mold, a shipping and storage container, and a dispenser housing. The cast chemical may be dispensed by inverting the container over a spray nozzle and impinging solvent directly onto the exposed surface or surfaces of the chemical contained therein. The container may either be retained within the dispenser as the chemical is being used, or the chemical may be removed from the container and placed into the dispenser. However, hazardous chemicals used in cleaning processes such as highly alkaline detergents are preferably packaged such that they can be dispensed without coming into physical contact with the human body.

Known dispensing devices have sought to maintain a relatively constant rate of the chemical being dispensed, or a constant concentration, by maintaining a fixed distance between the dissolving spray nozzle and the exposed and erodible surface of the solid block of chemical. See, for example, commonly owned U.S. Pat. No. 4,687,121, issued to Copeland on Aug. 18, 1987; U.S. Pat. No. 4,690,305, issued to Copeland on Sep. 1, 1987, and U.S. Pat. No. 4,826,661, issued to Copeland et al May 2, 1988. Alternatively, a separate control system has regulated the amount of detergent dispensed and has maintained a constant concentration, thereby making it unnecessary to control the nozzle to-eroding surface distance.

In many situations, however, it is desirable for the chemical concentration to be variable. The optimum chemical concentration depends upon such factors as the type of solid chemical being dispensed, the type of surface being cleaned, the amount of soil being removed from the fabric or surface being cleaned, the temperature of the solvent, the degree of mechanical action applied to the fabric or surface being cleaned, and the volume of cleaning solution being produced. In the past, adjusting the concentration of the cleaning solution has typically been done manually by the operator. That is, a certain amount of cleaning solution has been dispensed from the solid chemical, to which a certain amount of water is added. If a higher use solution concentration is desired, then less water is added to the concentrated cleaning solution. However, this procedure does not result in a

consistent, precise, and controlled solution concentration, and often results in the use of a solution having either too much or too little cleaning chemical concentration.

United States Patent No. 2,371,720 to Stine discloses an admixing and dispensing device applied to dishwashing machines. One of the objects of the invention is to "provide a method and device in which the rate of admixture is governed and controlled automatically by the flow of liquid". An upwardly disposed spray nozzle 10 projects a spray of water against a conical screen 8. The conical screen 8 supports a mass of caked or powdered chemical detergent. The water to the nozzle is provided by a pipe 20 which is the main rinse water supply. Water is directed to spray nozzle 10 through valve 15 and pipe 11. Valve 15 is of a design such that it also transmits a flow, proportional to the flow, through to a rinse line.

United States Patent No. 2,308,612 to Lehmkuhl discloses a dissolving apparatus in which water from a spray head 61 falls upon powdered detergent. The detergent is held in an inner container 31 which has a foraminous partition 41 in its center. The concentration of the dissolved powder in the liquid is adjusted by moving the nozzle closer to or further from the detergent powder. Adjusting the height of the nozzle changes the relative proportions of the water sprayed into the inner container holding the detergent and water sprayed into the space between the side walls of the inner and outer containers.

United States Patent No. 3,727,889 to Nagel discloses a fluid conduit 38 provided with a nozzle which projects a jet of liquid against a dry chemical. An automatically controlled valve 44 dispenses a *predetermined amount* of liquid against the chemical. The disclosure describes the control means 46 by a block diagram labeled "control" and states that "suitable automatic control means [are] well known in the art". The specification discloses a selector dial to select the amount of dilution water for a given cycle.

United States Patent No. 4,964,185 to Lehn discloses a pressure regulating valve 35 which maintains a constant flow rate of solvent to spray nozzle 31. The spray nozzle sprays the solvent onto solid or granular chemicals retainably held above the nozzle. The device forms a concentrated chemical solution and controls the amount of chemical dispensed.

United States Patent No. 5,505,915 to Copeland et al. discloses a solid chemical dispenser in which distance between the nozzle and the detergent can be varied. The position of the nozzle can be varied by a mechanical linkage or an automatic means such as a servo system.

- 5 United States Patent No. 3,982,666 to Kleimola et al. discloses a means to sequentially and automatically inject various liquid products into a laundry washing machine. The invention utilizes a signal generating device for generating electrical signals of a predetermined duration.

- 10 United States Reissue Patent No. 32,818 to Fernholz et al. discloses a method of using a cast detergent-containing article. The patent describes positioning the solid detergent over "spray means which is connected to a water source".

There remains a need for a simple, accurate method of dissolving and diluting a concentrated solid warewashing detergent using solely hydraulic control without complicated electronic control of water, chemical or mixing.

15

Brief Summary of the Invention

- Accordingly, the invention involves a hydraulic method for dispensing and controlling detergent and rinse aid use and active concentration in a warewashing machine. Accurate dispensing and control of active detergent concentrations is
- 20 obtained with no electronic detection or control of concentration. The value of the invention is that it uses fully hydraulic methods and avoids the complexity inherent in the use of electronic or electric controls. The dispensing means can have electronic components in the rinse feed system, with no electronic control of the detergent feed. The warewashing machine is plumbed such that a portion of the
- 25 service water from a water supply such as the final rinse line is diverted to a water, spray-on solid block detergent dispenser. The volume of water impinging on the solid detergent that governs the amount of detergent dispensed is in turn governed by volume-limiting or flow-limiting metering tips. A metering tip is selected with the time elapse or time period extent of the rinse cycle in mind such that the amount
- 30 of time water flows in the rinse step dispenses (using the bypassed water) the correct amount of detergent by the spray-on function. Whenever the rinse line is operated, in a periodic manner at in repeated time period and at a constant pressure, the correct

amount of detergent is dispensed solid detergent is dispensed to maintain the effective correct cleaning amount of detergent in the wash water. With the appropriate size of metering tip in the dispenser and the correct timing of the final rinse cycle, the appropriate proportions of aqueous detergent and rinse volume can be obtained in the machine to achieve both effective cleaning and rinsing. The machine can be economically operated by appropriate settings of rinse volume, rinse timing and a metering tip for the water impinging on the solid detergent in the dispenser. Once the metering tips are calibrated for an installation the machine will typically dispense consistently until the local service water pressure changes substantially.

The invention is found in an apparatus for maintaining an effective concentration of alkaline detergent in an aqueous wash or aqueous medium in a warewashing machine, which apparatus comprises a batch-fill warewashing machine having an aqueous rinse system, an alkaline detergent dispenser and a sump sized for a predetermined volume of the alkaline detergent in the aqueous medium; a source of the aqueous medium fluidly connected to the rinse system; means for controlling the flow of the aqueous medium through the rinse system; diverting means for obtaining a predetermined portion of the aqueous flow from the rinse system and for directing the diverted portion through a metering cap and volume control to the alkaline detergent dispenser, thereby to dissolve the alkaline detergent; and means for directing the dissolved alkaline detergent to the sump; wherein the detergent is dispensed only in a rinse cycle and an effective concentration of alkaline detergent is maintained in the warewashing machine sump.

25

Brief Description of the Figures

Figure 1 is a perspective view of a dispenser typical of the invention

Figure 2 is a perspective view of the same dispenser with the cover removed, exposing the components beneath.

Figure 3 is a closer view of a portion of **Figure 2**. Specifically, the lower portion of the detergent block compartment is visible, along with the sprayhead.

Figure 4 is a closer view of another portion of **Figure 2**. Specifically, this view provides a better look at the diverter valve and associated plumbing.

Figure 5 is a schematic for a metering tip useful in the invention.

Figure 6 is a schematic for a metering tip useful in the invention.

Figure 7 is a schematic for a metering tip useful in the invention.

Figure 8 is a schematic for a grate or screen useful in the invention.

5 **Figure 9** is a schematic for a grate or screen useful in the invention.

Figure 10 is a graphical representation of the control over detergent concentration obtained by varying metering tip and pressure

Detailed Description

10 **Figure 1** shows a dispenser 100 typical of the invention. Generally shown is a housing 110 with viewing apertures 140 and 150 for visual inspection of detergent and rinse aid remaining, respectively. The housing 110 also has a flip up lid 160. Also seen is the incoming rinse line 130 and an on/off switch 120.

Figure 2 shows the internal components 200 of a dispenser typical of the invention. This figure shows the internal compartments 210 and 220 suitable for
15 holding the solid block detergent and rinse aid, respectively. The plumbing is best described by tracing water flow through the device. Rinse water enters the apparatus 200 through a water line 130 and flows to a diverter valve 240. Seen is an electrical pressure sensor 264 which detects the flow of rinse water and activates the rinsing
20 pump 230 as appropriate. In the diverter valve 240, a small amount of the rinse water is sent through water line 250 to a fitting 270 which is in fluid communication with spray housing 292.

Within spray housing 292 is a spray head (not seen in this **Figure**, see **Fig. 3**) which provides a source of water to impinge on the solid block detergent (not
25 shown) which is supported by screen or grate 280. The dissolved detergent and diluent flows out of the apparatus 200 through an exit valve 296. The concentrated liquid detergent then is pumped into the wash tank in preparation for the next cycle.

The remaining rinse water flows through water line 260 to the rinsing pump 230. From here, a portion of the rinse water is sent through water line 290 and
30 enters compartment 220, where it impinges upon a solid block rinse aid, thereby dissolving a portion of it. The rinse water (now containing a portion of dissolved

rinse aid) is pumped via rinsing pump 230 to the rinsing portion of the warewashing machine.

A final feature seen in figure 2 concerns an additional warning of low detergent content. When the height of the remaining detergent block drops below a

5 predetermined level, check mark 294 is illuminated as an additional visual warning.

Figure 3 shows a portion 300 of the dispenser of the invention. Again, water line 250 and valve 270 are seen. Additional detail is seen in spray housing 292, in that a spray head 330 is visible. Also seen is the threaded nature of the spray housing 292, along with the complementary configuration of the aperture 320 at the
10 bottom of compartment 210.

Figure 4 is an exploded view 400 of the rinse water diverter valve 240. This shows the relationship between the valve 240, water line 250 and the metering tip 410.

Figure 5 is a schematic which shows a possible configuration 410 for a
15 metering tip useful in the invention.

Figure 6 is a schematic which shows a possible configuration 410' for a larger metering tip useful in the invention.

Figure 7 is a schematic which shows a possible configuration 410'' for a still larger metering tip useful in the invention.

Figure 8 is a schematic which shows a possible configuration 280 for a
20 screen or grate useful in the invention for supporting the solid block detergent.

Figure 9 is a schematic which shows a possible configuration 280' for an alternate size screen or grate useful in the invention for supporting the solid block detergent.

Figure 10 is a graphical representation of the concentration dispensed by the
25 dispenser using as variables, the metering tip size and service water line pressure. As can be seen in the figure, the active concentration of the detergent through metering tips that have a size of about 0.067 inch or 0.137 inch used in conjunction with a nozzle having differing spray patterns. Dispensing the detergent at pressures
30 that range from about 18 to 25 psi can vary the detergent concentration as the metering tip ranges from 0.067 to 0.137 inch from about 1000 ppm to about 1200 ppm. Similar variations in dispensing amounts can be seen with other combinations

of nozzle and metering tip. The concentrations shown in this figure relate to the concentration of the detergent in the concentrate, not in the use solution sprayed on the dishes for active cleaning purposes.

5 **Housing**

The external housing of the apparatus is typically opaque and is suitable for labeling. The housing can be made of any engineering resin, while polyethylene, polypropylene, polystyrene, ABS, acrylics, etc, are preferred. The internal compartments are typically transparent or translucent and are made from
10 polystyrene, polycarbonate or an acrylic.

Batch-fill Warewashing Machine

The apparatus of the invention is intended for use in batch-fill, non-continuous warewashing machines such as the Hobart Am 14 machine.

15 **Rinse Water and Diverting Means**

A portion of the rinse water is used to dissolve and dilute the concentrated solid detergent to form a concentrated liquid detergent which is pumped into the wash tank to provide wash solution for the next cycle. As shown in figure 2, incoming rinse water flows into a diverter valve which splits the incoming rinse
20 diluent into two unequal streams; a low volume stream which serves to dissolve a portion of solid block detergent and a high volume stream which continues on as rinse water. Typically, the rinse diluent is split to the low volume stream of about 0.05 to 2 gal.-min⁻¹, preferably about 0.1 to 0.9 gal.-min⁻¹ to the detergent dispenser and to the high volume stream in the rinse aid dispenser at a rate greater than the low
25 volume stream.

Metering Tips

The amount of detergent dissolved and dispensed is determined in part by the size of the metering tips used. Figures 5-7 show three possible metering tip
30 configurations. All three embodiments shown possess the same taper angle. Therefore, the relationship between inlet and outlet inner diameters is determined solely by the overall length of the metering tip. In addition, each metering tip also

has the same externally un-tapered length. The relevant data for each metering tip is given in the table below:

Table 1

Metering Tips Geometry (see also Figs. 5-7)

Inlet Inner Diameter (inches)	Outlet Inner Diameter (inches)	Overall Length (inches)	Flow Rate (gal.-min ⁻¹ @ 10 psi)
0.240	0.067	1.41	0.28
0.240	0.100	1.03	0.43
0.240	0.137	0.60	0.56

5

Obviously, the range of flow restrictions possible from each metering tip depends on the inlet diluent pressure, which can range within normal utility service water from about 5 to 50 psi..

10 Grate/Screen

The amount of detergent dissolved and dispensed is determined in part by the grid size of the supporting grate or screen used. Figures 8-9 show several possible grate or screens. The two embodiments shown are similar in overall size, with an overall length of 6.80 inches and an overall width of 4.45 inches. These dimensions are determined by the particular size of solid block detergent used and are not to be considered as limiting the invention in anyway. The overall horizontal shape of the screen or grate is determined in the same way. In these embodiments, the screens or grates are roughly bi-lobal.

15

The embodiments shown differ substantially in grid size. The first screen has a typical weave or square grid wherein the strands are on average 0.50 inches apart. In contrast, the other screen has a weave wherein the strands are only 0.13 inches apart. This dramatically affects the dissolution and dilution rates, as shown here.

20

Alkaline Detergent

The apparatus of the invention is designed to dispense any suitable solid warewashing detergent known to those in the art. Typically, said detergents
 5 comprise one or more surfactants, along with minor components and may optionally comprise bleaching agents. As examples, the standard, chlorinated and metal protecting formulations given below can be dispensed in the apparatus of the invention.

Ingredients	Standard Formulation	Chlorinated Formulation	Metal Protecting Formulation
Dense Ash	50.79	40.90	34.09
Sodium Silicate	---	2.00	17.50
Sodium Tripolyphosphate	30.00	29.02	28.75
Hydroxyethylidene diphosphonic acid	---	5.50	5.68
Aminotrimethylene phosphonic acid	5.90	---	---
Sodium Hydroxide (50%)	4.38	---	---
Potassium Hydroxide (45%)	---	7.97	8.28
Nonionic defoamer	1.30	1.30	1.30
Nonionic surfactant	2.50	2.50	2.50
Sodium dichloroisocyanurate	---	4.25	---
Inerts to 100%	5.13	6.56	1.90

10 The above specification, drawings and testing provide a basis for understanding the invention. Many embodiments, however can be made without departing from the spirit of the invention. The invention is embodied in the claims hereinafter appended.

WE CLAIM:

1. An apparatus for maintaining an effective concentration of alkaline detergent in an aqueous medium in a warewashing machine, which apparatus
5 comprises:
- (a) a batch-fill warewashing machine having an aqueous rinse system, an alkaline detergent dispenser and a sump sized for a predetermined volume of the alkaline detergent in the aqueous medium;
 - (b) a source of the aqueous medium fluidly connected to the rinse
10 system;
 - (c) means for controlling the flow of the aqueous medium through the rinse system;
 - (d) diverting means for obtaining a predetermined portion of the aqueous flow from the rinse system and for directing the diverted portion
15 through a metering cap and volume control to the alkaline detergent dispenser, thereby to dissolve the alkaline detergent; and
 - (e) means for directing the dissolved alkaline detergent to the sump;
- wherein the detergent is dispensed only in a rinse cycle and an effective concentration of alkaline detergent is maintained in the warewashing machine sump.
20
2. The apparatus of claim 1 wherein the effective concentration of detergent is 50 to 3500 parts by weight of detergent per million parts of diluent.
3. The apparatus of claim 1 wherein both the diverting means and the
25 metering tips can be varied independently to control the detergent dispensing rate.
4. The apparatus of claim 1 wherein detergent is dispensed only while rinse water is flowing.
- 30 5. The apparatus of claim 1 wherein the apparatus comprises a grate with predetermined dimensions supporting the solid detergent that affects the dispensing rate.

6. The apparatus of claim 1 wherein the detergent concentrations are measured within the wash tank.
- 5 7. The apparatus of claim 1 wherein the detergent concentration is achieved within 2 machine cycles.
8. The apparatus of claim 1 wherein the detergent dispenser also delivers a rinse aid.

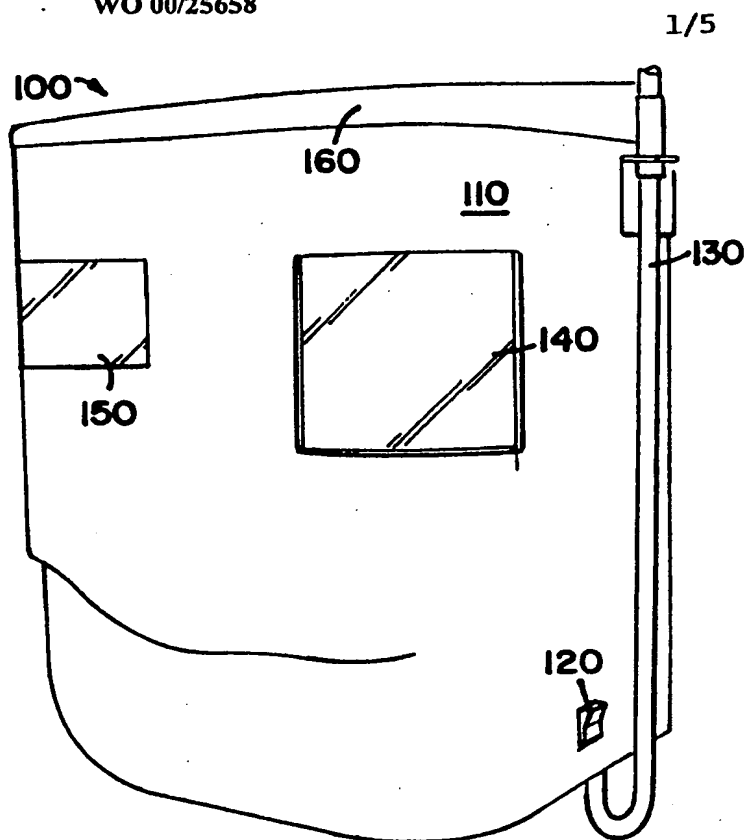


FIG. 1

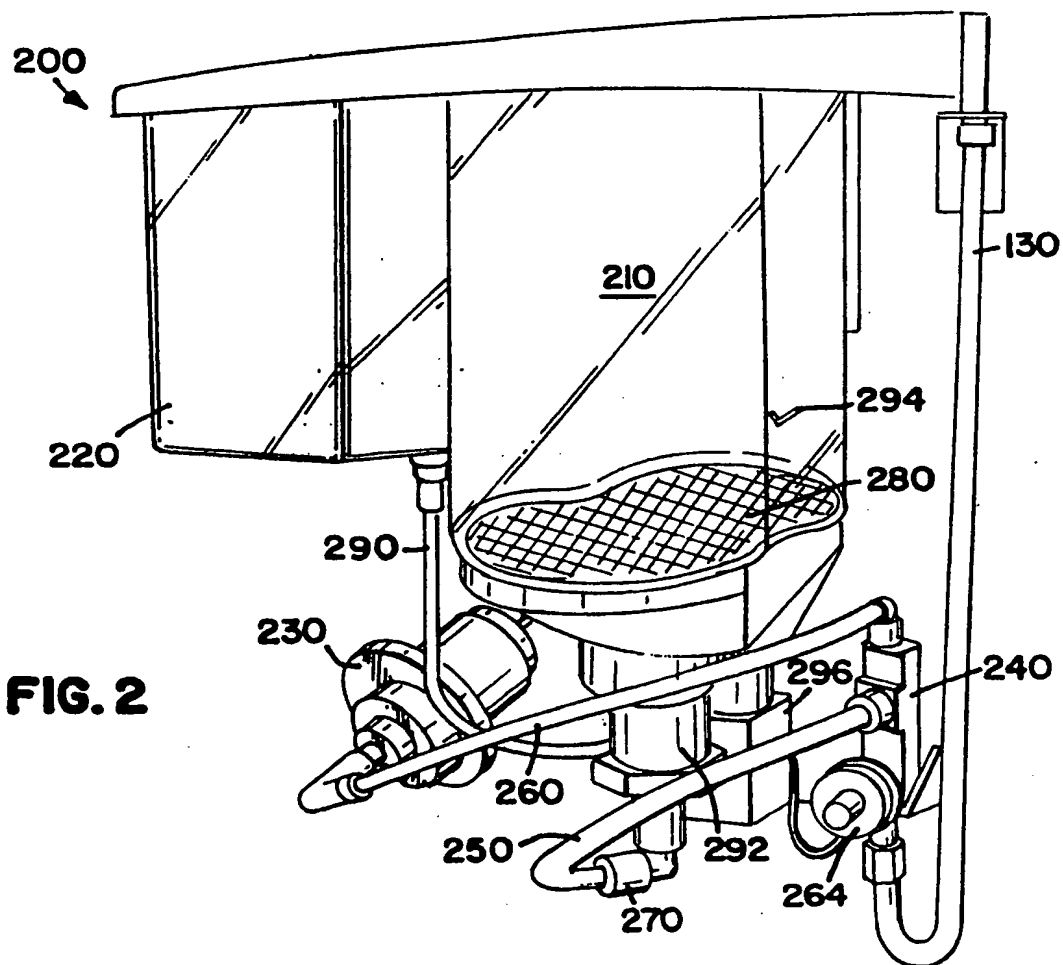


FIG. 2

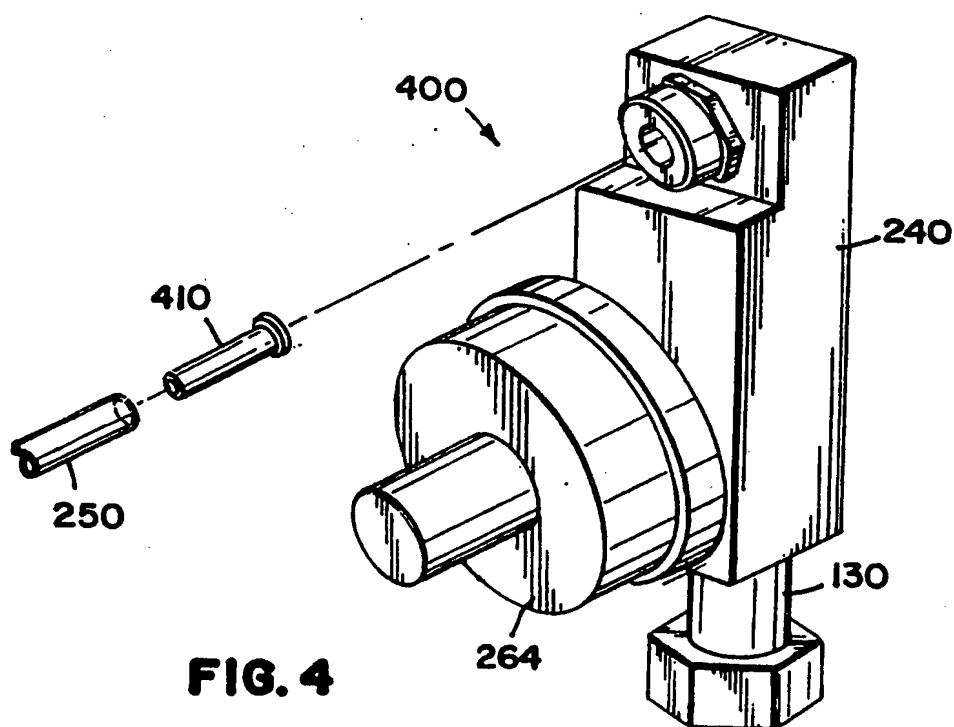
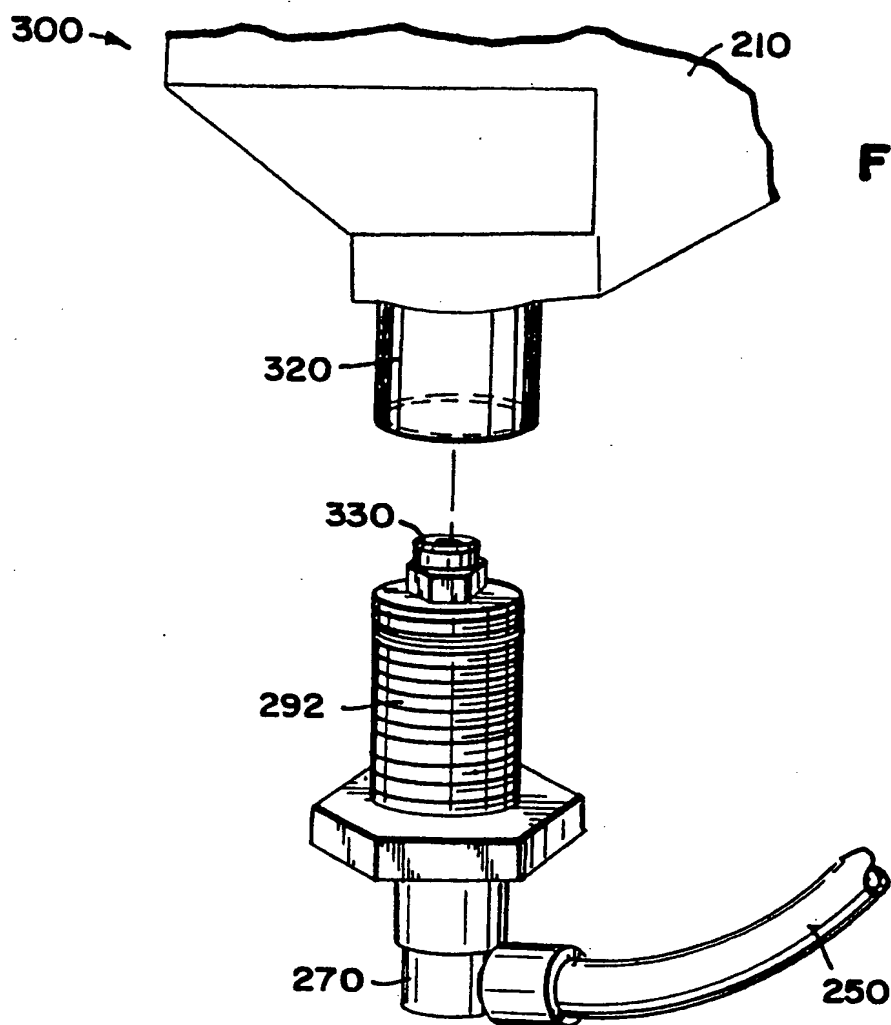


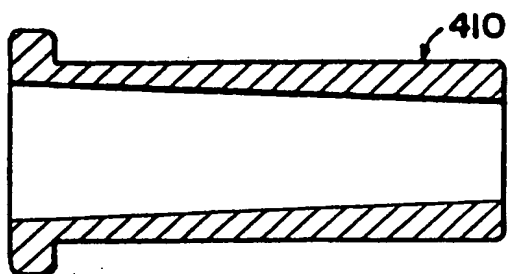
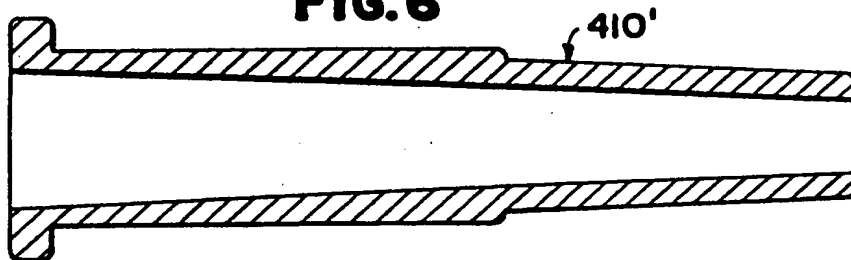
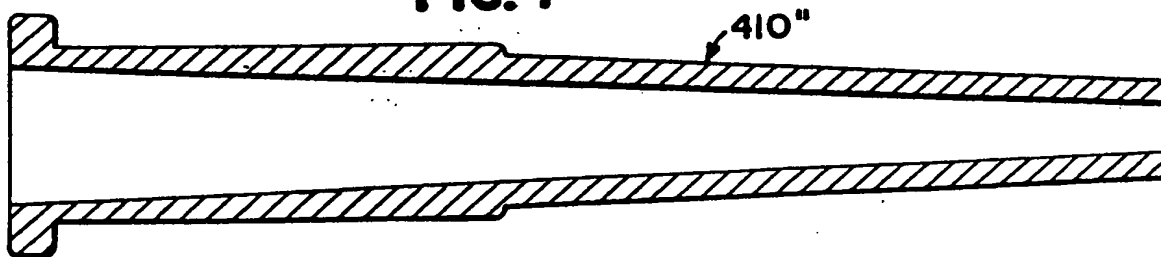
FIG. 5**FIG. 6****FIG. 7**

FIG. 8

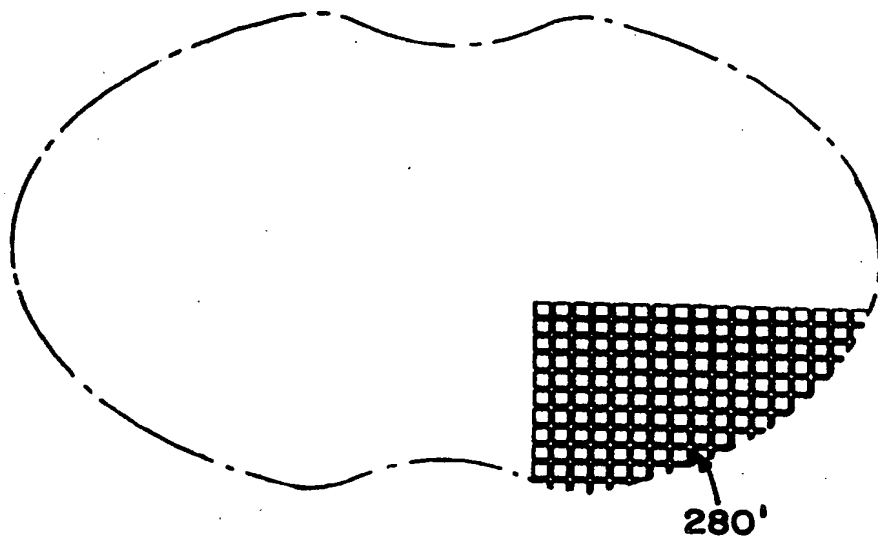
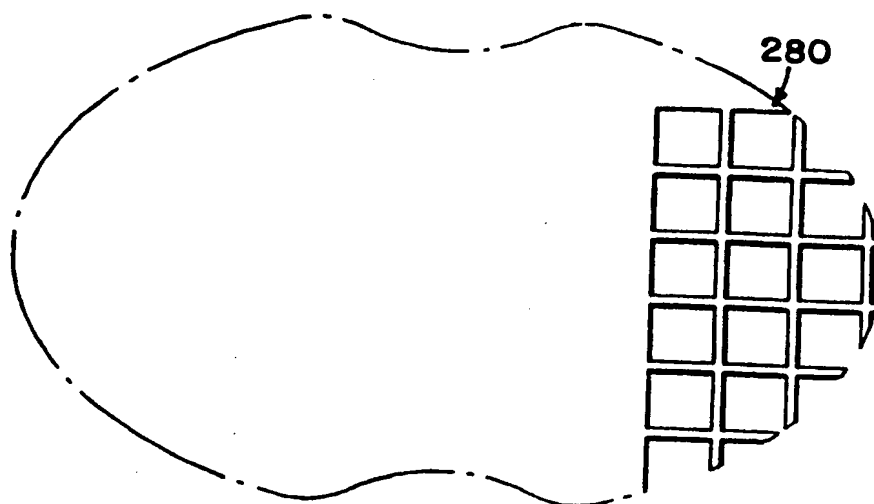


FIG. 9

GeoSystems 9000 Gemini Hydraulic Dispenser National Launch Design

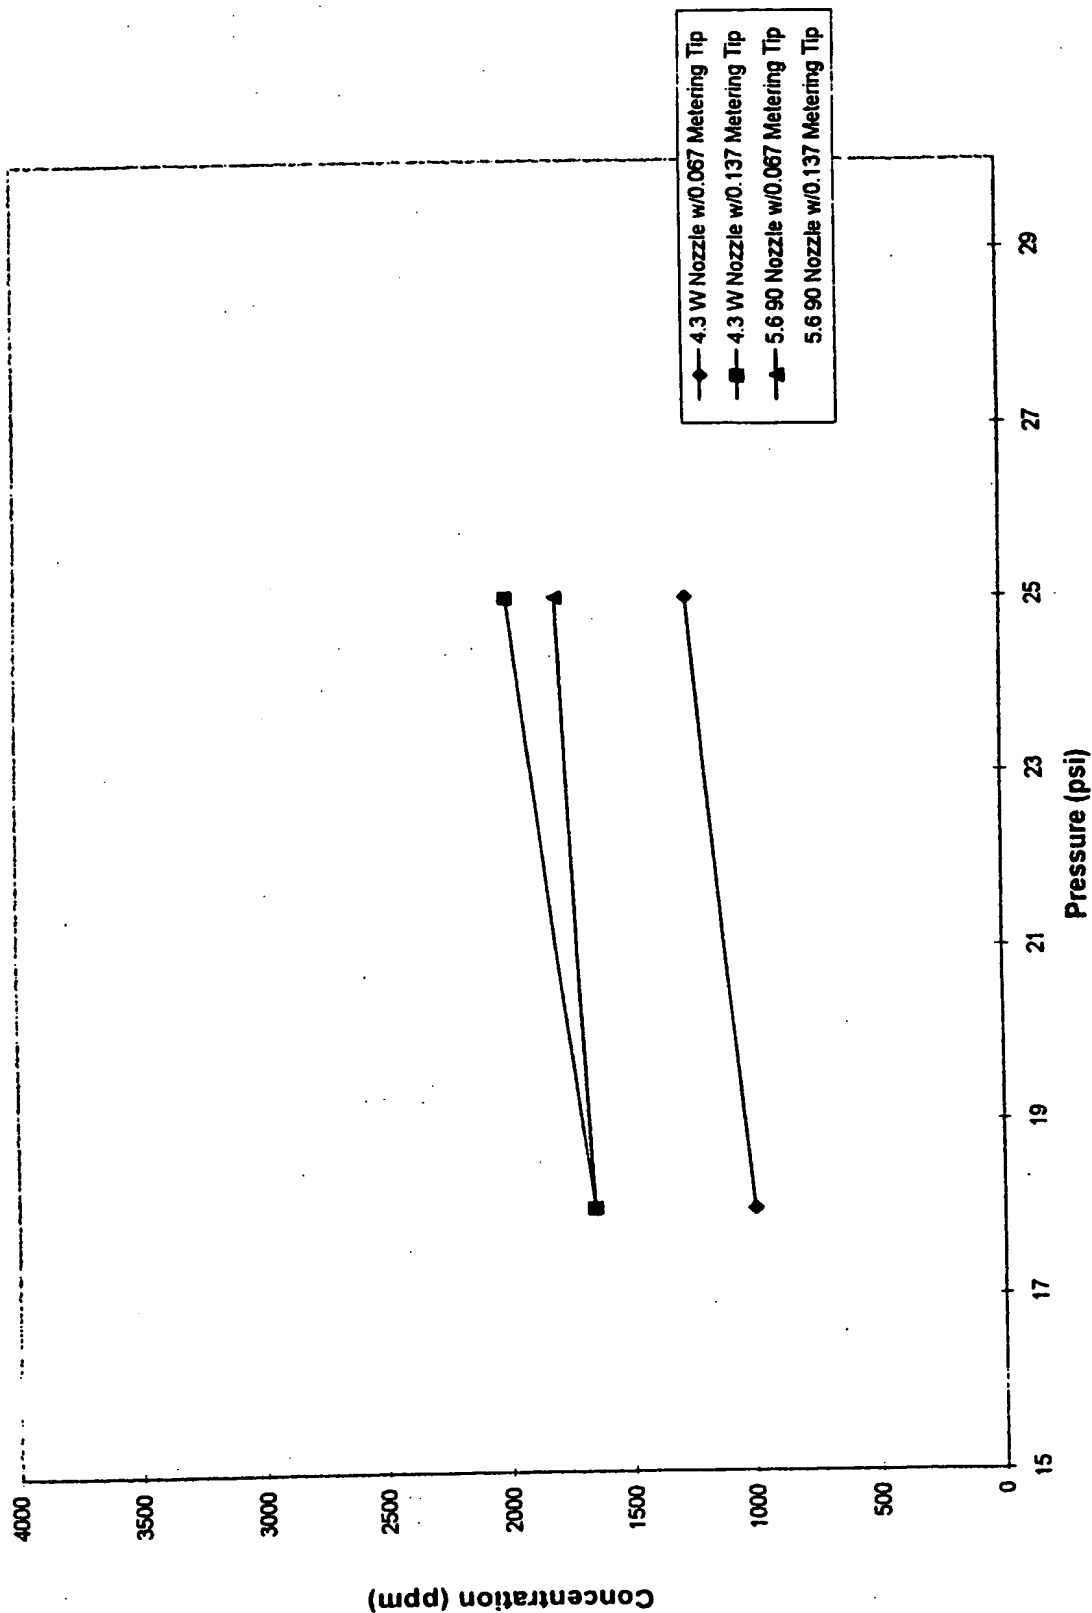


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/24419

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A47L15/44

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A47L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 733 798 A (BRADY DANIEL F ET AL) 29 March 1988 (1988-03-29) abstract; figure 1	1,6
Y	US 5 268 153 A (MULLER EDWARD J) 7 December 1993 (1993-12-07) column 4, line 34 -column 8, line 10; figures 3-5	1,6
A	US 5 448 115 A (HOWLAND DAVID R ET AL) 5 September 1995 (1995-09-05) column 3, line 1 -column 6, line 14	1,4
A	US 5 007 559 A (YOUNG CECIL B) 16 April 1991 (1991-04-16) abstract	1,5
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 March 2000

Date of mailing of the international search report

29/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Norman, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/24419

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 549 875 A (LAUGHLIN TIMOTHY E ET AL) 27 August 1996 (1996-08-27) the whole document</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/24419

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4733798	A	29-03-1988	AU 575507 B	28-07-1988
			AU 6615186 A	20-08-1987
			BE 906055 A	16-04-1987
			CA 1270047 A	05-06-1990
			GR 862864 A	07-04-1987
			JP 62219109 A	26-09-1987
			NZ 218525 A	28-06-1989
US 5268153	A	07-12-1993	NONE	
US 5448115	A	05-09-1995	NONE	
US 5007559	A	16-04-1991	NONE	
US 5549875	A	27-08-1996	US 5478537 A	26-12-1995
			US 5342587 A	30-08-1995